


Technical Data - 1 Channel Repeater (101-201101)

Technical Data - 1 Channel Repeater (101-201101)			
Dimensions and weight			
Dimensions L x W x H	137 x 25 x 103 mm (including backplane, per module)		
Weight	112 g (excluding plug-able connectors, backplane and packing material)		
Mounting DIN-rail type	35mm × 7.5mm (EN 50022, BS 5584, DIN 46277-3)		
Ambient conditions			
Ambient operating temperature range	-20° ... +60° Celsius (for mounting position see manual) -4° ... 158° Fahrenheit		
Isolating class	IP 20 (IEC/EN 60529, DIN 40050)		
Backplane			
PROFIBUS networks	4 (set by dipswitches or web server)		
Modules	10 (positioned in the first 10 slots)		
Power supply	Provided through the backplane		
Typical backplane current consumption	300 mA (at 5.72 VDC)		
Max. backplane current consumption	500 mA (at 5.72 VDC) At this current consumption the module is switched OFF from backplane. Occurs when module is faulty, e.g. internal short circuit.		
Compatible backplane units	101-200011, 101-200022, 101-200023, 101-200024, 101-200027		
Protocol specifications			
Supported Protocols	DP-V0, DP- V1, DP-V2, FDL, MPI, FMS, PROFIsafe, PROFIdrive and any other FDL based protocol		
Address	NO bus address required		
Transmission speed	9.6 kbps .. 12 Mbps (including 45.45 kbps)		
Transmission speed detection	Auto detect (< 10 s detection and 50 s baudrate switchover time)		
Data delay time	At baudrate	Normal mode	Redundant mode
	9.6 - 500 kbps	2.8 Tbit	13.8 Tbit
	1.5 Mbps	3.2 Tbit	14.2 Tbit
	3 Mbps	3.9 Tbit	14.5 Tbit
	6 Mbps	4.6 Tbit	15.6 Tbit
	12 Mbps	6.4 Tbit	17.4 Tbit

Technical Data - 1 Channel Repeater (101-201101)																							
Deviation	2 bit times (over the complete message) for received messages is allowed and is corrected to nominal speed when transmitted.																						
PROFIBUS cable specifications																							
Cable lengths	1200 m at 9.6 kbps to 93.75 kbps 1000 m at 187.5 kbps 400 m at 500 kbps 200 m at 1.5 Mbps 100 m at 3 Mbps to 12 Mbps																						
Wire diameter (for the screw terminals) Wire type	< 2.5 mm ² Stranded or solid core																						
Number of devices	Maximum 31 devices per channel (busload)																						
Termination	Integrated and switchable Powered according to PB RS 485 (390/220/390 Ohms)																						
Redundancy	Yes, maximum 10 cables activated by switch																						
Cascading depth	No limit (only limited by busparameter of the master)																						
Cascading units	With standard busparameters: <table> <thead> <tr> <th>At baudrate</th><th>Normal mode[units]</th></tr> </thead> <tbody> <tr><td>9.6 kbps</td><td>7</td></tr> <tr><td>19.2 kbps</td><td>7</td></tr> <tr><td>45.45 kbps</td><td>42</td></tr> <tr><td>93.75 kbps</td><td>7</td></tr> <tr><td>187.5 kbps</td><td>7</td></tr> <tr><td>500 kbps</td><td>17</td></tr> <tr><td>1.5 Mbps</td><td>23</td></tr> <tr><td>3 Mbps</td><td>19</td></tr> <tr><td>6 Mbps</td><td>16</td></tr> <tr><td>12 Mbps</td><td>15</td></tr> </tbody> </table> Formula to calculate number of cascading units with adjusted T_{slot} : $\text{Cascading units} = (T_{slot} - \max T_{sdr}) / (2 \times T_{data_delay_time})$ $T_{data_delay_time}$ is described in protocol specifications on previous page. Example 1.5 Mbps, normal mode: $\text{Cascading units} = (300-150) / (2 \times 3.2) = 23$	At baudrate	Normal mode[units]	9.6 kbps	7	19.2 kbps	7	45.45 kbps	42	93.75 kbps	7	187.5 kbps	7	500 kbps	17	1.5 Mbps	23	3 Mbps	19	6 Mbps	16	12 Mbps	15
At baudrate	Normal mode[units]																						
9.6 kbps	7																						
19.2 kbps	7																						
45.45 kbps	42																						
93.75 kbps	7																						
187.5 kbps	7																						
500 kbps	17																						
1.5 Mbps	23																						
3 Mbps	19																						
6 Mbps	16																						
12 Mbps	15																						

Technical Data - 1 Channel Repeater (101-201101)											
Connector Lay-out											
PROFIBUS SCREW Terminal CH1	<u>Plug-able screw terminal, pitch 5,08 mm</u> Pin A: PROFIBUS A (green wire) Pin B: PROFIBUS B (red wire) Pin SH: Shield Pin I: Indirect Shield										
PROFIBUS DB9 CH1	<u>D Sub connector, 9 contacts (PROFIBUS specification)</u> Pin 1: N.C. Pin 2: N.C. Pin 3: PROFIBUS - B Pin 4: PROFIBUS - RTS Pin 5: GND Pin 6: VPP Pin 7: N.C. Pin 8: PROFIBUS - A Pin 9: N.C. Housing: Shield <i>Pin SH is connected internally to the DIN-rail with spring-loaded contact.</i> <i>Pin I is connected internally with 10nF/1MOhm to shield.</i>										
LEDs											
RDY : Ready RX : Receiving ER : Error Receiving SW : Switch Network Termination	Module is ready for operation (ON) Receiving telegrams (blinking) No or bad receiving telegrams detected (ON or blinking) Network termination active (ON)										
Dipswitches											
<table> <tr> <th>NW0</th><th>NW1</th></tr> <tr> <td>LEFT</td><td>LEFT</td></tr> <tr> <td>RIGHT</td><td>LEFT</td></tr> <tr> <td>LEFT</td><td>RIGHT</td></tr> <tr> <td>RIGHT</td><td>RIGHT</td></tr> </table> RED LEFT RIGHT H/S LEFT RIGHT	NW0	NW1	LEFT	LEFT	RIGHT	LEFT	LEFT	RIGHT	RIGHT	RIGHT	PROFIBUS Network 1 2 3 4 Redundancy OFF ON Settings Hardware Software
NW0	NW1										
LEFT	LEFT										
RIGHT	LEFT										
LEFT	RIGHT										
RIGHT	RIGHT										

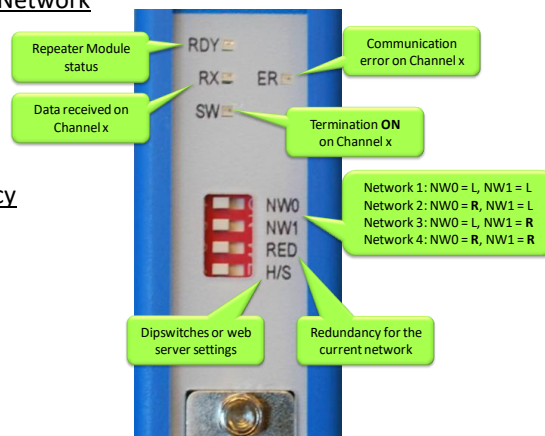

Technical Data - 1 Channel Repeater (101-201101)	
Standard and approvals	
CE	EMC Directive 2014/30/EU, class A Digital Device RoHs Directive 2011/65/EU
FCC	47 CFR 15, Unintentional Radiator, class A Digital Device.
UL	Report reference: E468970 Standards for safety: UL 508 - Industrial Control Equipment, CSA C22.2 No. 142-M1987 - Industrial Control Equipment
Others	
Head Station firmware MTBF	ALL 2595178 hours, at 30° Celsius, IEC TR 62380
PROCEN^{TEC} Klopperman 16 2292 JD WATERINGEN (NL)	Tel.: +31-174-671800 Fax: +31-174-671801 Email: info@procentec.com